
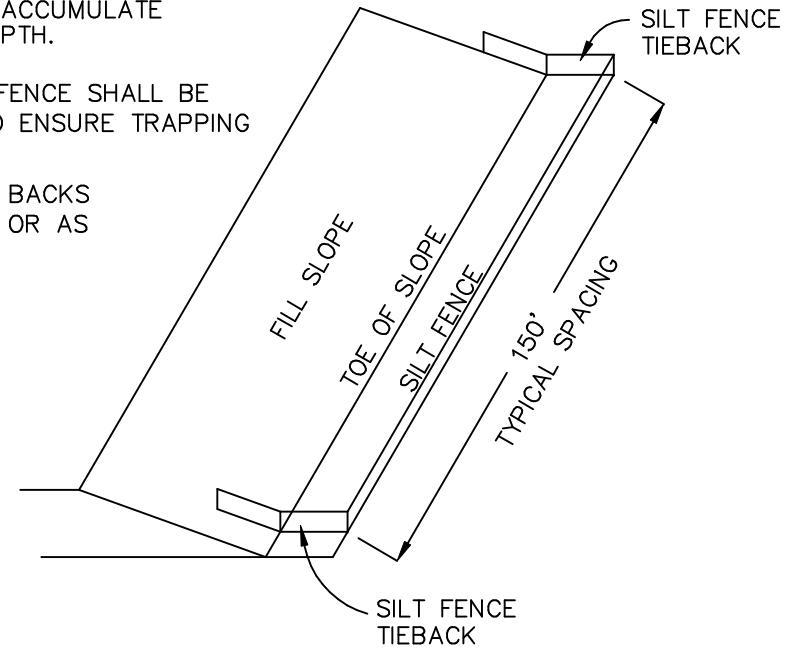


1. CHECK AND REPAIR SILT FENCE EVERY 7 DAYS OR AFTER EACH SIGNIFICANT RAINFALL (0.5 INCHES OR GREATER).
2. DO NOT ALLOW SILT TO ACCUMULATE GREATER THAN 8" IN DEPTH.
3. THE ENDS OF THE SILT FENCE SHALL BE TURNED UP CONTOUR TO ENSURE TRAPPING OF SEDIMENT.
4. PROVIDE SILT FENCE TIE BACKS EVERY 150' HORIZONTAL OR AS SHOWN ON PLANS.

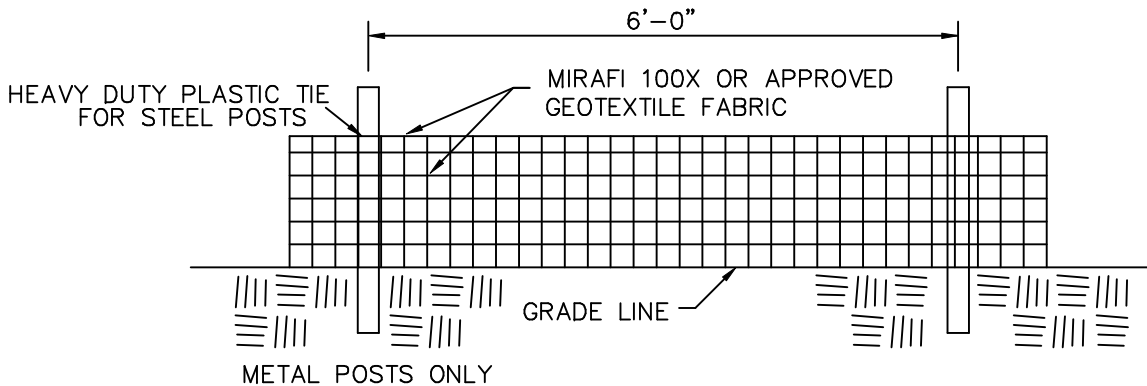

INSTALL SILT FENCE TIEBACK TO THE REQUIRED DISTANCE NECESSARY FOR THE ELEVATION OF TOE = HEIGHT OF FENCE

DETAIL OF SILT FENCE

NOT TO SCALE