

Default Equipment Table

Quantity	Symbol	Description	Size
1		Wilkins Double Check Backflow Preventer in Line	1 1/2"

Quantity	Symbol	Description	Size
11		PSI Drip Wye Filter 100 Micron	1"
11		Senninger 30PSI Pressure Regulator	1"
2		Tuacor Line Surge Protector	
8		Tuacor Field Decoder	

Quantity	Symbol	Description	Size
10		MP Rotator MP Rotator - 1804 MP-1000 90°	14.00 ft
21		MP Rotator MP Rotator - 1804 MP-1000 180°	14.00 ft
1		MP Rotator MP Rotator - 1804 MP-1000 240°	14.00 ft
1		MP Rotator MP Rotator - 1804 MP-2000 90°	20.00 ft
1		MP Rotator MP Rotator - 1804 MP-2000 120°	20.00 ft
8		MP Rotator MP Rotator - 1804 MP-2000 180°	20.00 ft
5		MP Rotator MP Rotator - 1804 MP-2000 240°	20.00 ft
5		MP Rotator MP Rotator - 1804 MP-3000 90°	30.00 ft
3		MP Rotator MP Rotator - 1804 MP-3000 180°	30.00 ft


Quantity	Symbol	Description	Size
900 ft		200 PSI SDR 21 PVC Pipe	3/4"
1100 ft		200 PSI SDR 21 PVC Pipe	1"
100 ft		200 PSI SDR 21 PVC Pipe	1-1/4"

Quantity	Symbol	Description	Size
600 ft		160 PSI SDR 26 PVC Pipe	1-1/2"


Quantity	Symbol	Description	Size
		Schedule 40 PVC Pipe	4"

Quantity	Symbol	Description	Size
1		1-1/2" Meter	61.00 gpm @ 50.00 PSI

Quantity	Symbol	Description	Size
6		100SBV Weathermatic Electric Valve	1"
2		150SBV Weathermatic Electric Valve	1-1/2"

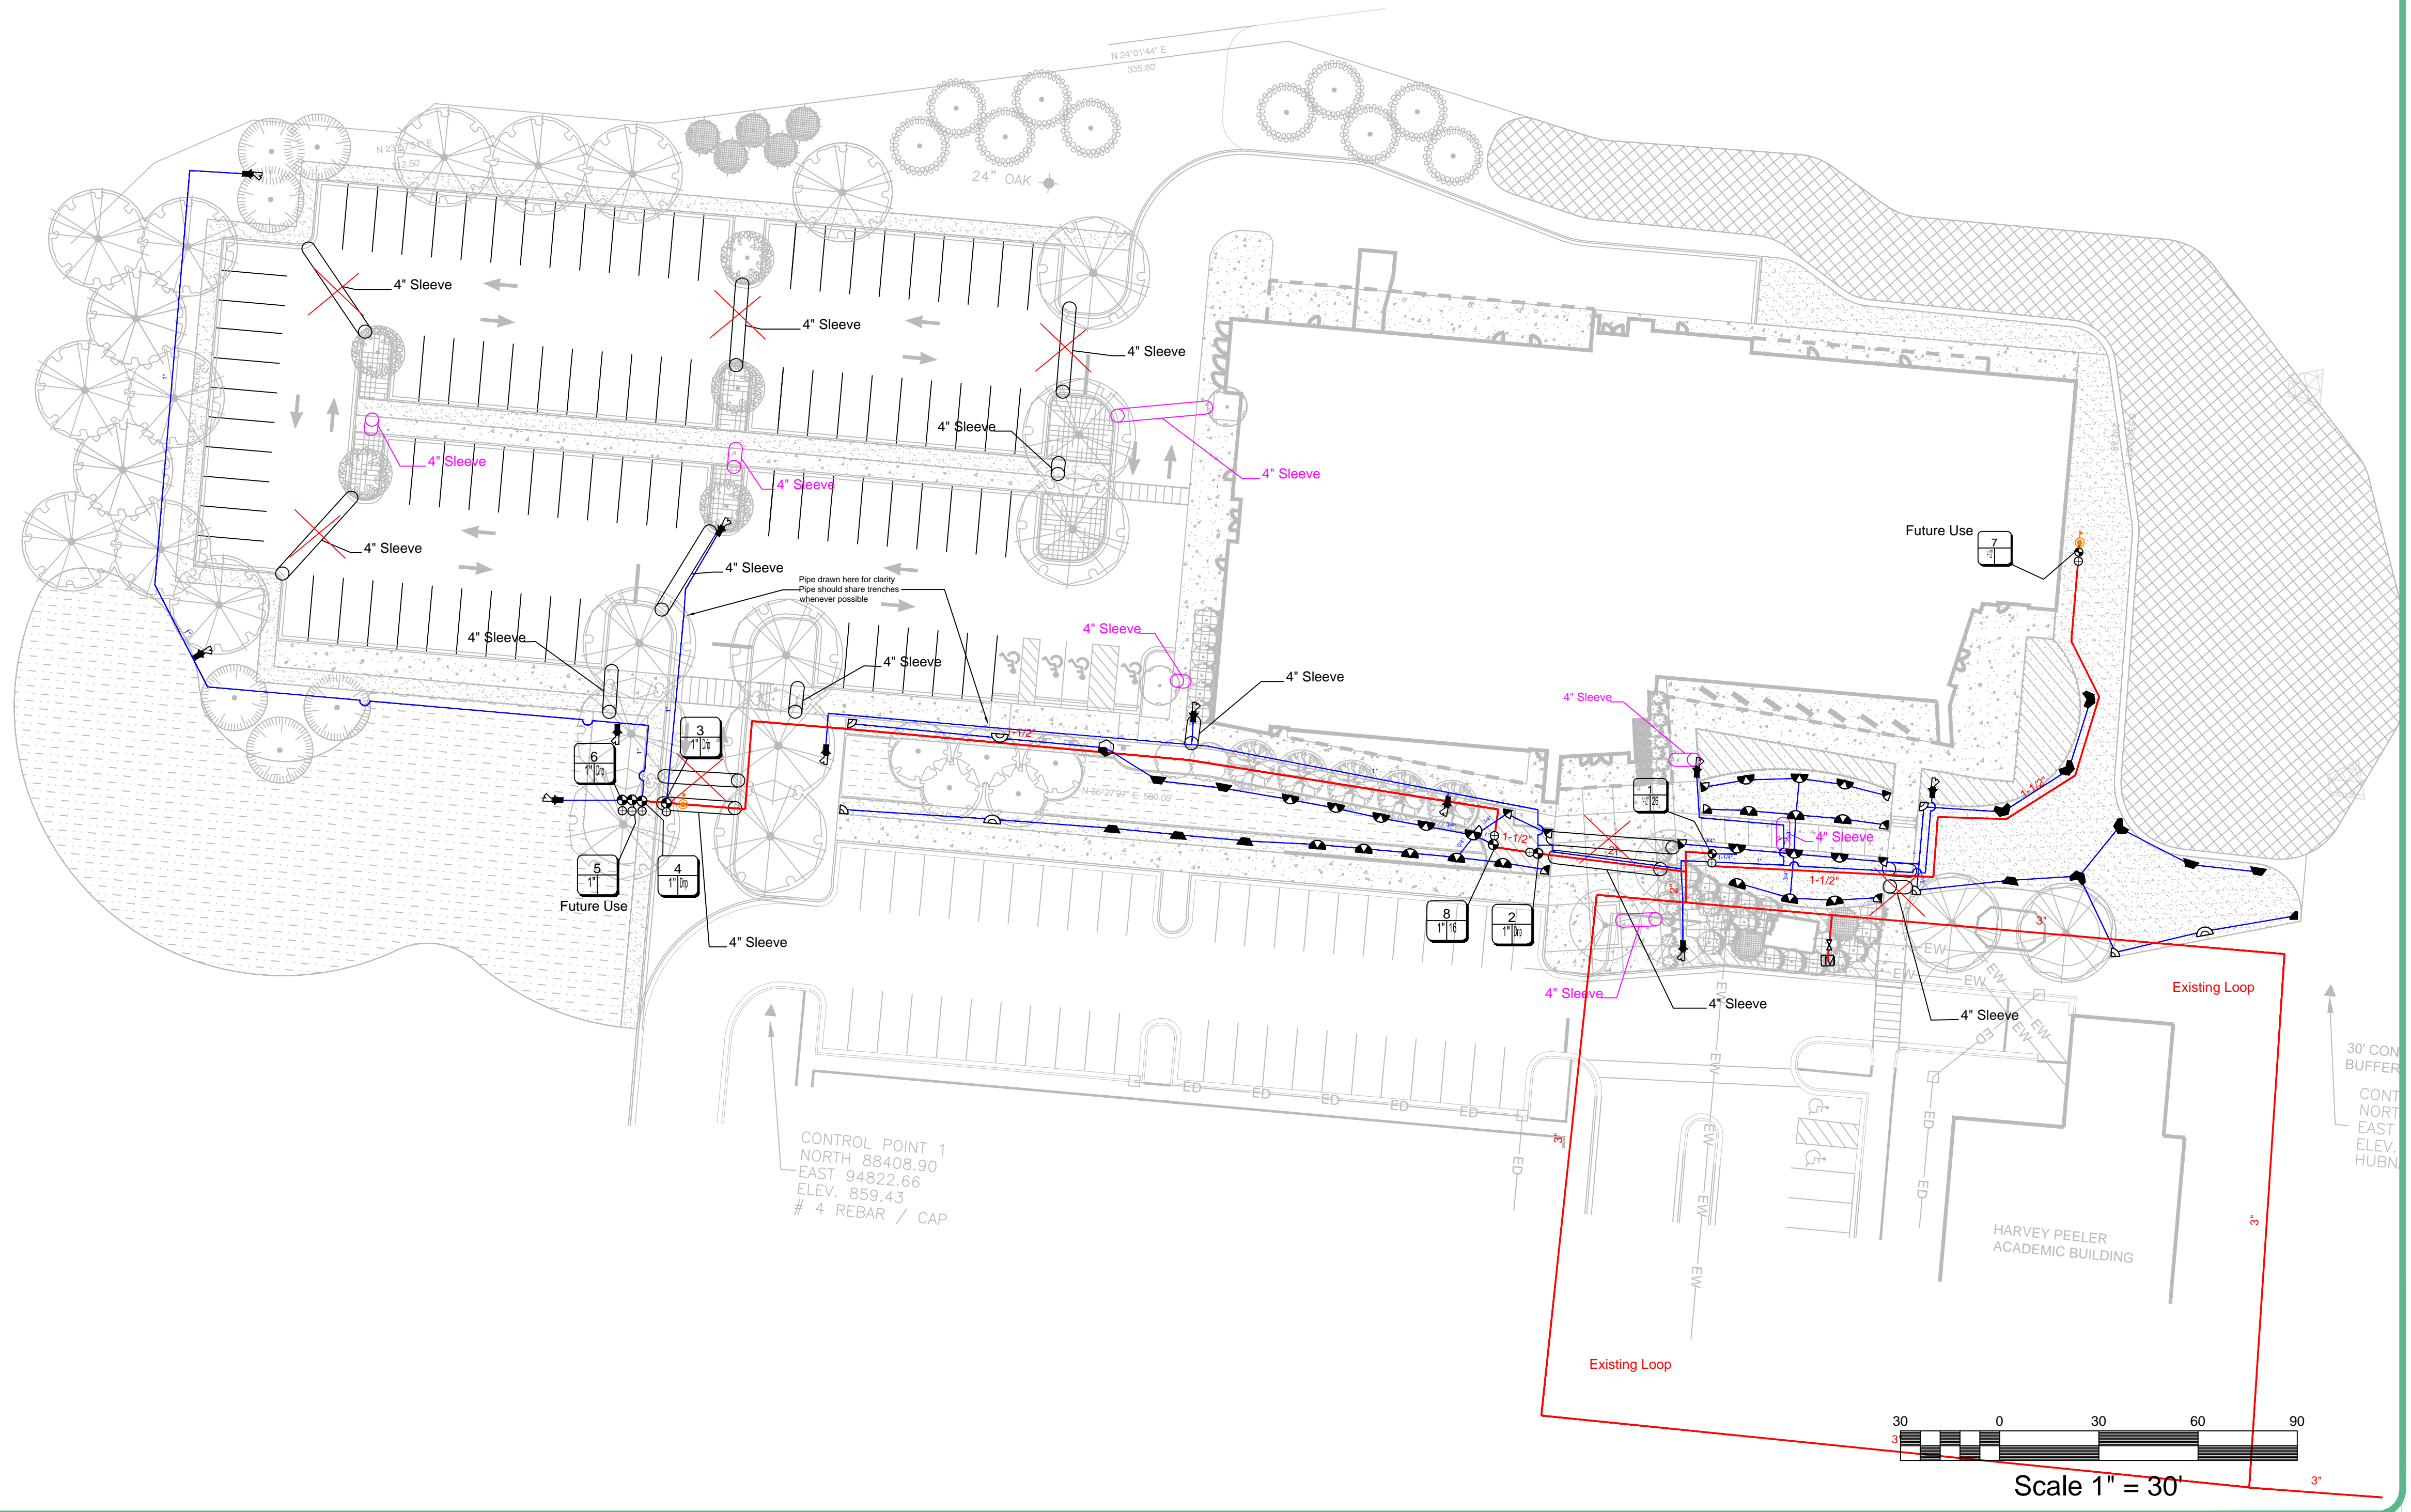

W.P. LAW
INCORPORATED

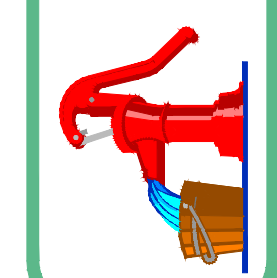

**IRRIGATION PLAN FOR
SCC CHEROKEE CAMPUS**

CAD FILE:	
DRAWN BY:	PHB
CHECKED BY:	
DATE STARTED:	
DATE FINISHED:	
PAGE #:	1
TOTAL # OF PAGES:	1

